

LED High Power Top Lighting Module is energy saving and environmentally friendly product for the horticultural industry. The high power Top light is modular and can fit 200, 400 and 600W power modules, which makes the fixture perfect for conventional greenhouses. The mutual efforts of our engineering and R&D teams ensure high quality product with sturdy body, IP65 protection factor, uniformity of the light and appropriate light recipe. With a life span of 50 000h this product will ensure positive growing results in any facility.



Features and Benefits

- Available in different PPF output packages to meet all of your applications requirements
- Ambient operating temperatures: -20°C to 55°C
- Beam angle 120°
- Accessory lenses with 60*100 degrees distribution for better uniformity
- Special liquid potting technology
- Different power consumptions to replace 400, 600 and 1000W HPS

Applications

- Greenhouses

CERTIFICATES AND STANDARDS

THE PRODUCT IS CERTIFIED OR IN COMPLIANCE TO VARIOUS REGULATORY REQUIREMENTS



Product Selection Guide

Product Group	Power (W)	PPF($\mu\text{mol/s}$)	Spectrum
Top light	200	~520	Twin Peaks
Top light	400	~1040	Twin Peaks
Top light	600	~1560	Twin Peaks
Top light	200	~600	Red Blast
Top light	400	~1200	Red Blast
Top light	600	~1800	Red Blast

Technical Data

General Characteristics

Average Rated Life (hrs)	>50000
Energy Saving Product	Yes
Switching Cycle	>50000X
IP Factor	IP 65
Length (mm)	825
Width (mm)	320
Height (mm)	121
Product Weight (kg)	12

Electrical Characteristics

Nominal Rated Wattage (W)	200/400/600
Voltage (V)	120~277
Frequency (Hz)	50/60
Power Factor	> 0.9
Dimmable	No
Starting Time	< 1s

Optical Characteristics:


Beam Angle (deg)	120°/60x100°
Rated Average PPF ($\mu\text{mol/s}$)	See Table 1
LLMF – End Nominal Lifetime	70%

Temperature Characteristics:



Maximum Case Temperature ($^{\circ}\text{C}$)	65
Operating Temperature ($^{\circ}\text{C}$)	0 to 65
Storage Temperature ($^{\circ}\text{C}$)	-30 to 80

Light Distribution Curve

Twin Peaks

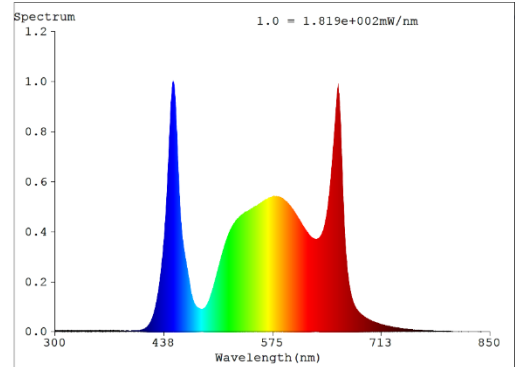


Red Blast

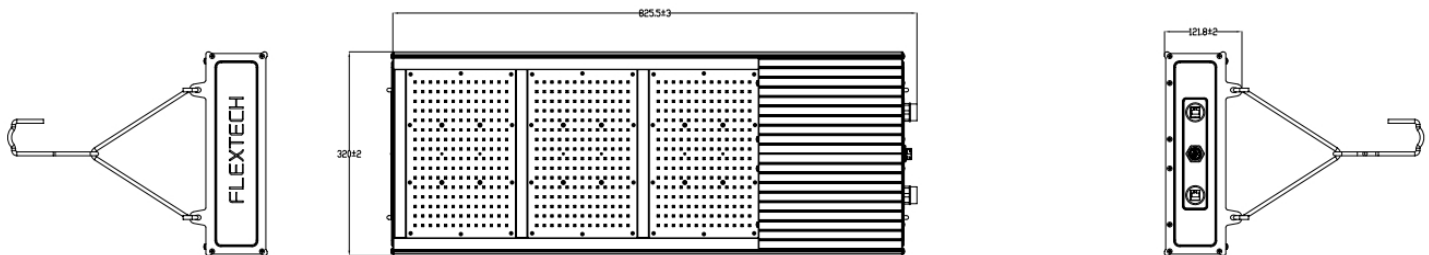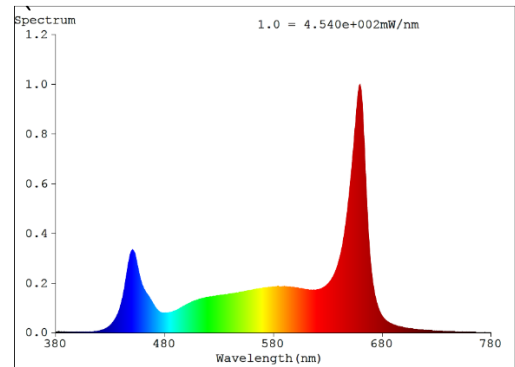

Packaging and Shipping

Box Size	QTY/Carton	CBM/Carton	Weight (G.W. KG)
910*400*180	1	0.066	14.6

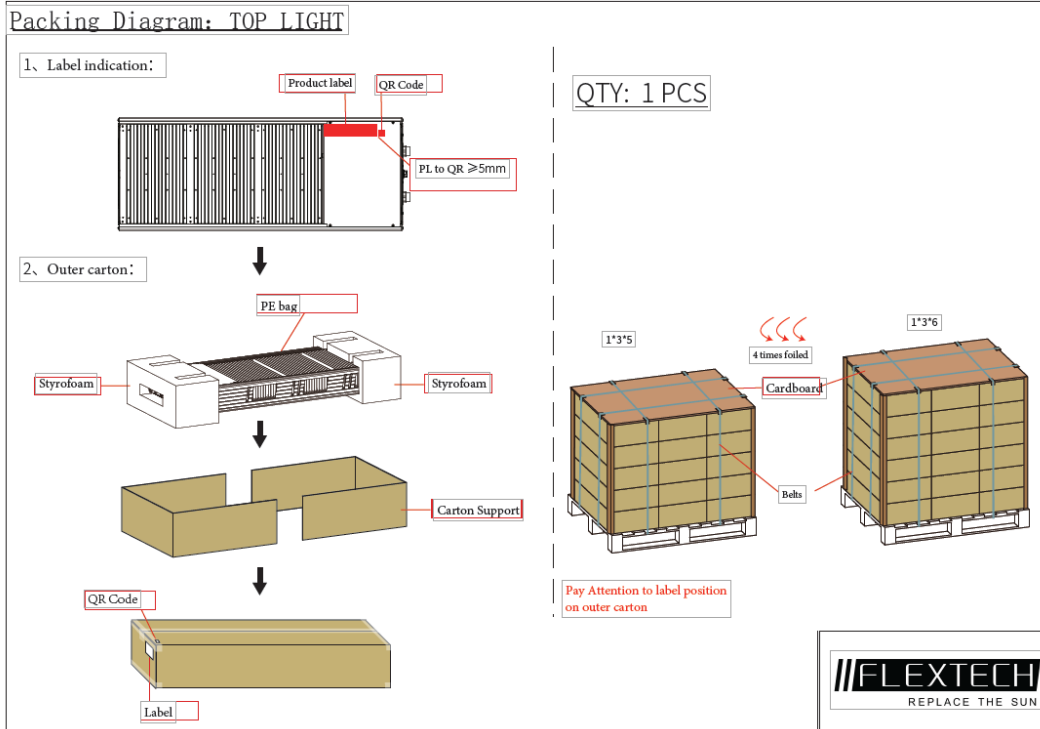

DISCLAIMERS

All precautions and instructions must be carefully followed as per the guidelines provided on the package. The limited warranty does not apply to any damage or failure due to any natural act, or from misuse, abuse, abnormal use, improper power supply, power surges or fluctuations, or any use or installation in violation of the instructions or restrictions prescribed by Flextech Solutions or any applicable standard or code, including those contained in latest Nation Electrical Code, UL, or ANSI.

Accessories Included



2PCS Snaps

Accessories for purchasing



1PCS Power cable

If you have any enquiries and questions, please contact us.
XIAMEN FLEXTECH SOLUTION CO.,LTD

sales@flectch.com

FLEXTECH
REPLACE THE SUN